


## TYPICAL CUL-DE-SAC STREET SECTION A-A



## NOTES:

- 1. PARKING SHALL BE ON BOTH SIDES OF THE STREET.
- 2. MAXIMUM CUL-DE-SAC LENGTH FROM THE CENTER OF THE INTERSECTING STREET TO THE CENTER OF THE CUL-DE-SAC, SHALL NOT EXCEED 600'.
- 3. RADIUS FOR CUL-DE-SAC, RESIDENTIAL = 46 FT. COMMERCIAL/INDUSTRIAL = 50 FT.
- 4. INCREASE RADIUS AS REQUIRED FOR LOT FRONTAGE MINIMUM LOT FRONTAGE IS 35 FT., AND THE LOT WIDTH AT THE BUILDING SETBACK LINE SHALL BE NOT LESS THAN 45 FT. (PER HOLLISTER MUNI-CODE).
- 5. CUL-DE-SAC SERVING 6 OR FEWER LOTS, SHALL BE APPROVED BY THE AGENCY ENGINEER.
- 6. INSTALL 6" X 6" X #10 WIELDED WIRE MESH ON THE ENTIRE DRIVEWAY.

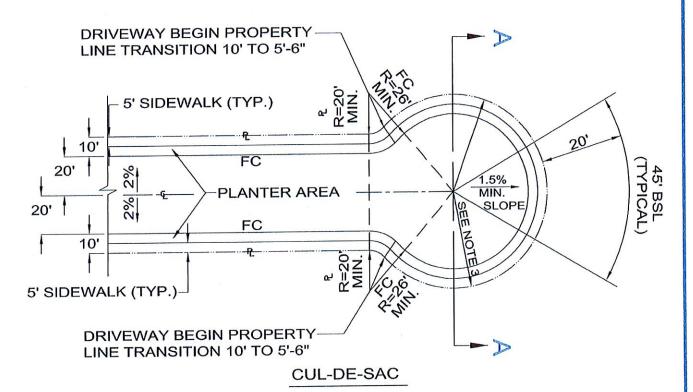